


A **TATA** Product

VOLTAS

Presenting
VOLTAS ADJUSTABLE
INVERTER AC

Different cooling capacities. Different cooling needs.

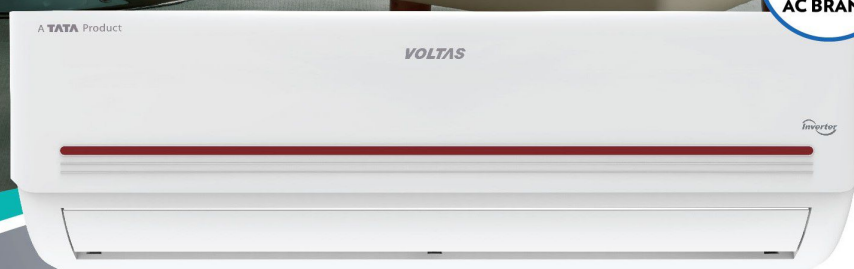

VOLTAS ADJUSTABLE
INVERTER SPLIT AC RANGE **2024**

VOLTAS ADJUSTABLE™
INVERTER AC



LEADERS IN AC TECHNOLOGY

Reasons to choose Voltas Adjustable Inverter AC

Voltas Adjustable Inverter AC has a unique Adjustable Mode which can run on different capacities depending on number of people in the room and ambient weather conditions.

VOLTAS ADJUSTABLE INVERTER AC




ADJUSTABLE MODE

Runs at four different
cooling capacities.



SUPERDRY

Quick
dehumidification.



HIGH AMBIENT COOLING

Keeps you comfortable
even at 52°C.



ANTI-CORROSIVE COATING ON EVA (HP SIDE)

Enhances life by preventing
corrosion on coil.



ANTI-MICROBIAL AIR FILTRATION

Kills microbes, bacteria
and fungi.



5-SPEED FAN FUNCTION

Variable speed mode.



ECO-FRIENDLY REFRIGERANT

R32 Refrigerant
to protect environment.



WIDE VOLTAGE RANGE OPERATION

Protects the AC from voltage
fluctuation (110V to 285V)*.




100% COPPER

More durable.

*Features are available in select models only.

ADJUSTABLE INVERTER AC


Presenting the All New Voltas Adjustable Inverter AC with a unique Adjustable Mode. It can operate in different tonnages (0.7/1/1.2/1.5*), depending on the ambient temperature or number of people in the room. Hence, it not only keeps you comfortable in different situations, but also saves on your electricity bills.

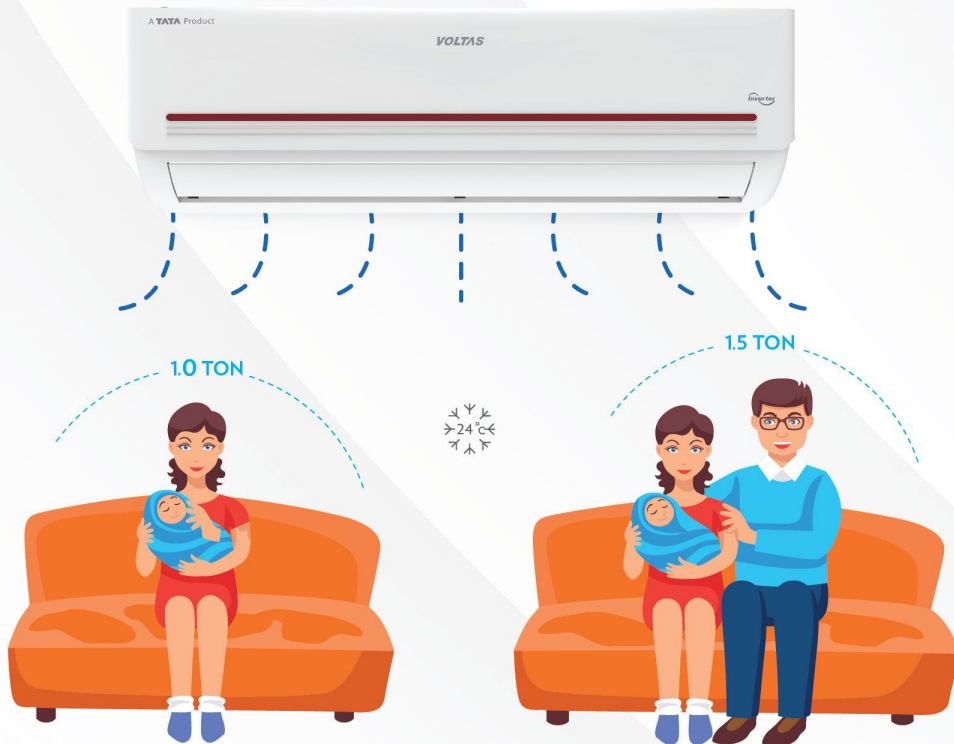

ADJUSTABLE MODE

Saves Power & Keeps You Comfortable in Different Conditions

Adjustable mode delivers predefined lower cooling capacity by limiting the inverter compressor's operating frequency depending on the number of people in the room & ambient weather conditions. It runs on different tonnages, enabling less power consumption.


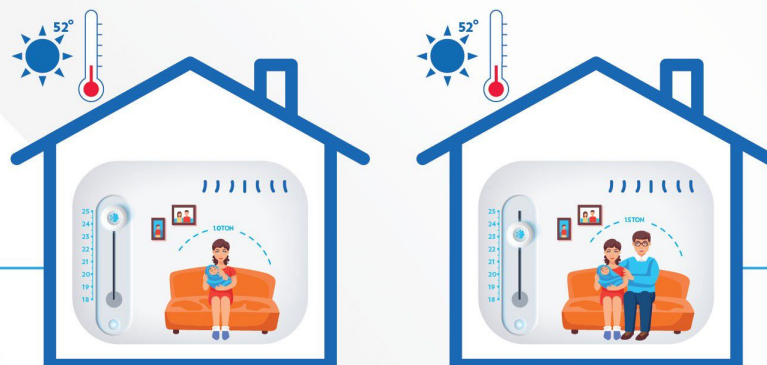




SUPERDRY


Quick Dehumidification

Superdry Mode dehumidifies the room quickly. The AC runs on predefined set temperature and at low indoor blower speed. This new mode captures the extra moisture from the air.



ANTI-MICROBIAL AIR FILTRATION

Eradicates microbes, bacteria and fungi.

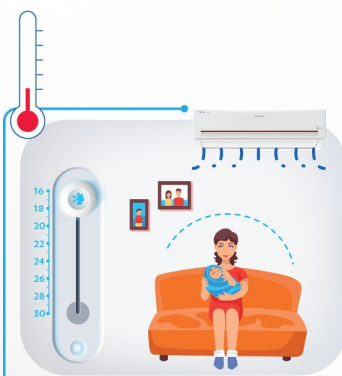

HIGH AMBIENT COOLING

Extreme Ambient Temperature Operations

The Voltas Inverter AC cools even at 52°C. With its superior cooling capacity, it cools easily at high temperature.




5-SPEED FAN FUNCTION

Variable Speed Mode


You have 5 fan speeds to choose from. This ensures superior comfort and convenience in all types of heat load.





WIDE VOLTAGE RANGE OPERATION

Voltas Adjustable Inverter AC can work under a wide operating range of (110-285 V) which guards the AC from Voltage Fluctuations. In addition, these ACs can operate at a voltage as low as 110 V.



ANTI-CORROSIVE COATING

For Protection and Durability

Anti-corrosive coating on cooling coil enhances life by preventing chances of corrosion.



FEATURES - ADJUSTABLE AC



VECTRA ELITE



AVAILABLE IN - 1 TR | 1.5TR



AVAILABLE IN - 1TR | 2TR



ADJUSTABLE
MODE



SUPER DRY



HIGH AMBIENT
COOLING



ANTI-CORROSIVE
COATING ON EVA (HP SIDE)



ANTI-MICROBIAL
AIR FILTRATION



ECO-FRIENDLY
REFRIGERANT



5-SPEED FAN
FUNCTION



WIDE VOLTAGE
RANGE OPERATION



100%
COPPER



VECTRA ELEGANT



AVAILABLE IN - 1.5TR




AVAILABLE IN - 1TR | 2TR



ADJUSTABLE
MODE



SUPER DRY



HIGH AMBIENT
COOLING



ANTI-CORROSIVE
COATING ON EVA (HP SIDE)



ANTI-MICROBIAL
AIR FILTRATION



ECO-FRIENDLY
REFRIGERANT



5-SPEED FAN
FUNCTION




WIDE VOLTAGE
RANGE OPERATION



100%
COPPER

FEATURES - ADJUSTABLE AC

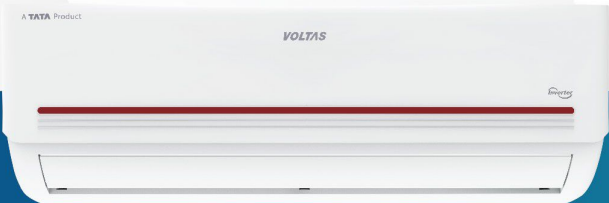

VECTRA PRISM



AVAILABLE IN - 1.5TR




AVAILABLE IN - 1.5TR



ADJUSTABLE
MODE



SUPERDRY



HIGH AMBIENT
COOLING



ANTI-CORROSIVE
COATING ON EVA (HP SIDE)



ANTI-MICROBIAL
AIR FILTRATION



ECO-FRIENDLY
REFRIGERANT



5-SPEED FAN
FUNCTION



WIDE VOLTAGE
RANGE OPERATION



100%
COPPER



VECTRA PRIME



AVAILABLE IN - 1.5TR



ADJUSTABLE
MODE



SUPERDRY



HIGH AMBIENT
COOLING



ANTI-CORROSIVE
COATING ON EVA (HP SIDE)



ANTI-MICROBIAL
AIR FILTRATION



ECO-FRIENDLY
REFRIGERANT



5-SPEED FAN
FUNCTION



WIDE VOLTAGE
RANGE OPERATION



100%
COPPER

FEATURES - ADJUSTABLE AC



VECTRA PLATINA




AVAILABLE IN - 1.5TR



ADJUSTABLE
MODE



SUPERDRY



HIGH AMBIENT
COOLING



ANTI-CORROSIVE
COATING ON EVA (HP SIDE)



ANTI-MICROBIAL
AIR FILTRATION



ECO-FRIENDLY
REFRIGERANT



5-SPEED FAN
FUNCTION



WIDE VOLTAGE
RANGE OPERATION



100%
COPPER



VECTRA PRISTINE



AVAILABLE IN - 1.5TR



ADJUSTABLE
MODE



SUPERDRY



HIGH AMBIENT
COOLING



ANTI-CORROSIVE
COATING ON EVA (HP SIDE)



ANTI-MICROBIAL
AIR FILTRATION



ECO-FRIENDLY
REFRIGERANT



5-SPEED FAN
FUNCTION




WIDE VOLTAGE
RANGE OPERATION



100%
COPPER

FEATURES - ADJUSTABLE AC

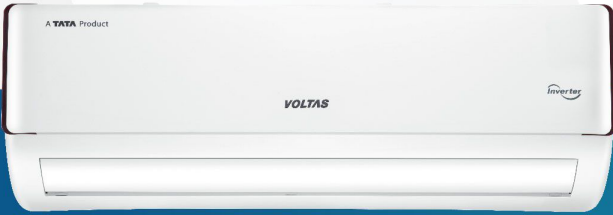

VECTRA EDEN

★★★★★ AVAILABLE IN - 1.5TR



ADJUSTABLE
MODE



SUPERDRY



HIGH AMBIENT
COOLING



ANTI-CORROSIVE
COATING ON EVA (HP SIDE)



ANTI-MICROBIAL
AIR FILTRATION



ECO-FRIENDLY
REFRIGERANT



5-SPEED FAN
FUNCTION



WIDE VOLTAGE
RANGE OPERATION



100%
COPPER



VECTRA PLUS

★★★★★ AVAILABLE IN - 2TR



ADJUSTABLE
MODE



SUPERDRY



HIGH AMBIENT
COOLING



ANTI-CORROSIVE
COATING ON EVA (HP SIDE)



ANTI-MICROBIAL
AIR FILTRATION



ECO-FRIENDLY
REFRIGERANT



5-SPEED FAN
FUNCTION



WIDE VOLTAGE
RANGE OPERATION



100%
COPPER

TECHNICAL SPECIFICATIONS

• 5 STAR INVERTER •

SERIES		VOLTAS ADJUSTABLE - VECTRA SERIES - 5 STAR					
Model		125V Vectra Elite(4503444)	185V Vectra Eden(4503604)	185V Vectra Elite(4503617)	185V Vectra Prism(4503612)	185V Vectra Elegant(4503452)	245V Vectra Plus(4503517)
CBU Code		4503444	4503604	4503617	4503612	4503452	4503517
ODU Code		4513342	4513494	4513504	4513500	4513350	4513417
IDU Code		4553282	4553441	4553451	4553447	4553290	4553359
Rated Power Supply	Phase / Frequency / Voltage	230 / 50 / 1 Phase	230 / 50 / 1 Phase	230 / 50 / 1 Phase	230 / 50 / 1 Phase	230 / 50 / 1 Phase	230 / 50 / 1 Phase
Voltage Range	V	110-285	110-285	110-285	110-285	110-285	110-285
Power Supply Connection		Indoor unit	Indoor unit	Indoor unit	Indoor unit	Indoor unit	Indoor unit
Min Cooling Capacity	W	1750	2425	2425	2415	2425	3100
Max Cooling Capacity	W	3900	5300	5300	5300	5300	6900
Rated Cooling Capacity 100%	W	3500	4850	4850	4830	4850	6200
Min - Max Power Input	W	340-1060	445-1460	445-1460	442-1460	445-1460	552-1944
Rated Power Input 100%	W	843	1250	1250	1249	1250	1650
ISEER	Wh/Wh	5.00	5.00	5.00	5.00	5.00	5.00
Star Rating		5	5	5	5	5	5
Electricity Consumption (Annual Based on 1600 Hours BEE Norms)	kWh/year	535.32	751.28	751.28	748.27	751.28	959.19
Indoor Unit (IDU)							
Panel Colour	Color	White	White	White	White	White	White
IDU dimensions (W x H x D)	cm	80 x 26.5 x 21	96 x 31.7 x 23.5	96 x 31.7 x 23.5	96 x 31.7 x 23.5	96 x 31.7 x 23.5	110 x 33 x 25
Swing		2 Way	2 Way	2 Way	2 Way	2 Way	2 Way
Evaporator Fins		Hydrophilic Blue Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins
No. of Fan Speed		Auto/Turbo/High/Med/Low	Auto/Turbo/High/Med/Low	Auto/Turbo/High/Med/Low	Auto/Turbo/High/Med/Low	Auto/Turbo/High/Med/Low	Auto/Turbo/High/Med/Low
Blower Motor Type		BLDC	BLDC	BLDC	BLDC	BLDC	BLDC
Airflow Rate	CMH	650	930	930	930	930	1400
Modes		Cool/Dry/Fan	Cool/Dry/Fan	Cool/Dry/Fan	Cool/Dry/Fan	Cool/Dry/Fan	Cool/Dry/Fan
Sleep Mode		Yes	Yes	Yes	Yes	Yes	Yes
Timer		24hrs	24hrs	24hrs	24hrs	24hrs	24hrs
Operation Sound	Turbo/High/Medium/Low (dbA)	46/44/42/38	47/45/43/38	47/45/43/38	47/45/43/38	47/45/43/38	51/49/46/44
Filter		Anti Dust with Anti Microbial Coating	Anti Dust with Anti Microbial Coating	Anti Dust with Anti Microbial Coating	Anti Dust with Anti Microbial Coating	Anti Dust with Anti Microbial Coating	Anti Dust with Anti Microbial Coating
IDU Net Weight	Indoor Unit Net/Gross Weight (Kg)	8.3/10.5	11.1/13.8	11.1/13.8	11.8/14.3	11.1/13.8	13.7/17.3
Remote		LCD Remote	LCD Remote	LCD Remote	LCD Remote	LCD Remote	LCD Remote
Temperature Setting Range	°C	16-30	16-30	16-30	16-30	16-30	16-30
Anti Freeze Thermostat		Yes	Yes	Yes	Yes	Yes	Yes
Indoor Display		Hidden Display	Hidden Display	Hidden Display	Hidden Display	Hidden Display	Hidden Display
Auto Clean		Yes	Yes	Yes	Yes	Yes	Yes
Adjustable		4 Step	4 Step	4 Step	4 Step	4 Step	4 Step
Memory Restart		Yes	Yes	Yes	Yes	Yes	Yes
Outdoor Unit (ODU)							
ODU Dimensions (W x H x D)	cm	83.5 x 55.5 x 29.5	83.5 x 55.5 x 29.5	83.5 x 55.5 x 29.5	83.5 x 55.5 x 29.5	83.5 x 55.5 x 29.5	90 x 65 x 36.5
Condenser Type		Copper Condenser	Copper Condenser	Copper Condenser	Copper Condenser	Copper Condenser	Copper Condenser
ODU Weight	Net/Gross Weight (kg)	26.2/31.5	26.5/31.5	26.4/31.5	26/31	26/30.3	32.7/39
Compressor Type		High EER Rotary - BLDC	High EER Rotary - BLDC	High EER Rotary - BLDC	High EER Rotary - BLDC	High EER Rotary - BLDC	High EER Twin Rotary - BLDC
Compressor Acoustic Jacket		Yes	Yes	Yes	Yes	Yes	Yes
Fan Motor Type		BLDC	BLDC	BLDC	BLDC	BLDC	BLDC
Expansion Device		Capillary	EEV	EEV	EEV	EEV	EEV
Refrigerant		R 32	R 32	R 32	R 32	R 32	R 32
Valve Size	Gas / Liquid (mm)	12.7mm / 6.35mm	12.7mm / 6.35mm	12.7mm / 6.35mm	12.7mm / 6.35mm	12.7mm / 6.35mm	15.87mm / 6.35mm
Maximum Ambient Temperature	°C	52	52	52	52	52	52
Installation Kit							
Copper Pipe	m	3	3	3	3	3	3.5
IDU to ODU Interconnecting Wire	Gauge / Core / Length	1.5 Sq mm / 4Core / 3 mtr	1.5 Sq mm / 4Core / 3 mtr	1.5 Sq mm / 4Core / 3 mtr	1.5 Sq mm / 4Core / 3 mtr	1.5 Sq mm / 4Core / 3 mtr	2.5 Sq mm / 4Core / 3.5 mtr
Maximum Piping Capability	Max. length (m)	12	15	15	15	15	15
	Max. Height (m)	5	5	5	5	5	5
Refrigerant Additional Charge	Beyond 4 metre (g/m)	8	10	10	10	10	10

* Noise level reflects the levels in Anechoic Chamber
 All above performance data are as per IS 1391 Rated conditions
 As a continuing policy of product innovation at Voltas, the design and specification are subjected to change without prior notice
 Product images are for illustrative purposes only and may differ from the actual product

TECHNICAL SPECIFICATIONS

• 3 STAR INVERTER •

SERIES

VOLTAS ADJUSTABLE - VECTRA SERIES - 3 STAR

Model		123V Vectra Elite-1(4503714)	123V Vectra Elegant(4503627)	183V Vectra Prism(4503523)	183V Vectra Platina(4503524)	183V Vectra Prime(4503447)	183V Vectra Pristine(4503731)	243V Vectra Elite(4503455)	243V Vectra Elegant(4503454)
CBU Code		4503714	4503627	4503523	4503524	4503447	4503731	4503455	4503454
ODU Code		4513578	4513517	4513422	4513423	4513345	4513593	4513353	4513352
IDU Code		4553534	4553467	4553370	4553371	4553285	4553547	4553293	4553292
Rated Power Supply	Phase/Frequency/Voltage	230 / 50 / 1 Phase	230 / 50 / 1 Phase	230 / 50 / 1 Phase	230 / 50 / 1 Phase	230 / 50 / 1 Phase	230 / 50 / 1 Phase	230 / 50 / 1 Phase	230 / 50 / 1 Phase
Voltage Range	V	110~285	110~285	110~285	110~285	110~285	110~285	110~285	110~285
Power Supply Connection		Indoor unit	Indoor unit	Indoor unit	Indoor unit	Indoor unit	Indoor unit	Indoor unit	Indoor unit
Min Cooling Capacity	W	1650	1650	2400	2400	2400	2400	3000	3000
Max Cooling Capacity	W	3750	3750	5050	5050	5050	5050	6050	6050
Rated Cooling Capacity 100%	W	3300	3300	4800	4800	4800	4800	6000	6000
Min - Max Power Input	W	400~1320	400~1320	580~1750	580~1750	580~1750	580~1750	734~2010	734~2010
Rated Power Input 100%	W	1115	1115	1615	1615	1615	1615	1995	1995
ISEER	Wh/Wh	3.80	3.80	3.81	3.81	3.81	3.81	3.81	3.81
Star Rating		3	3	3	3	3	3	3	3
Electricity Consumption (Annual Based on 1600 Hours BEE Norms)	kWh/year	672.93	672.93	975.26	975.26	975.26	975.26	1220.59	1220.59
Indoor Unit (IDU)									
Panel Colour	Color	White	White	White	White	White	White	White	White
IDU dimensions(W x H x D)	cm	80 x 26.5 x 21	80 x 26.5 x 21	84 x 29 x 21	84 x 29 x 21	88 x 27 x 20.5	88 x 27 x 20.5	96 x 31.7 x 23.5	96 x 31.7 x 23.5
Swing		2 Way	2 Way	2 Way	2 Way	2 Way	2 Way	2 Way	2 Way
Evaporator Fins		Hydrophilic Blue Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins	Hydrophilic Blue Fins
No. of Fan Speed		Auto/Turbo/High/Med/Low	Auto/Turbo/High/Med/Low	Auto/Turbo/High/Med/Low	Auto/Turbo/High/Med/Low	Auto/Turbo/High/Med/Low	Auto/Turbo/High/Med/Low	Auto/Turbo/High/Med/Low	Auto/Turbo/High/Med/Low
Blower Motor Type		BLDC	BLDC	BLDC	BLDC	BLDC	BLDC	BLDC	BLDC
Airflow Rate	CMH	650	650	750	750	810	810	930	930
Modes		Cool/Dry/Fan	Cool/Dry/Fan	Cool/Dry/Fan	Cool/Dry/Fan	Cool/Dry/Fan	Cool/Dry/Fan	Cool/Dry/Fan	Cool/Dry/Fan
Sleep Mode		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Timer		24hrs	24hrs	24hrs	24hrs	24hrs	24hrs	24hrs	24hrs
Operation Sound	Turbo/High/Medium/Low (dbA)	44/43/42/38	44/43/42/38	47/45/44/42	47/45/44/42	47/45/42/38	47/45/42/38	47/45/43/38	47/45/43/38
Filter		Anti Dust with Anti Microbial Coating	Anti Dust with Anti Microbial Coating	Anti Dust with Anti Microbial Coating	Anti Dust with Anti Microbial Coating	Anti Dust with Anti Microbial Coating	Anti Dust with Anti Microbial Coating	Anti Dust with Anti Microbial Coating	Anti Dust with Anti Microbial Coating
Indoor Unit	Net/Gross Weight (Kg)	8.2/10	8.3/10.5	9.5/11.5	9.5/11.5	8.5/10.7	8.5/10.7	11.1/13.8	11.1/13.8
Remote		LCD Remote	LCD Remote	LCD Remote	LCD Remote	LCD Remote	LCD Remote	LCD Remote	LCD Remote
Temperature Setting Range	°C	16-30	16-30	16-30	16-30	16-30	16-30	16-30	16-30
Anti Freeze Thermostat		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Indoor Display		Hidden Display	Hidden Display	Hidden Display	Hidden Display	Hidden Display	Hidden Display	Hidden Display	Hidden Display
Auto Clean		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Adjustable		4 Step	4 Step	4 Step	4 Step	4 Step	4 Step	4 Step	4 Step
Memory Restart		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Outdoor Unit (ODU)									
ODU Dimensions(W x H x D)	cm	69.5 x 46 x 28.2	69.5 x 46 x 28.2	83.5 x 55.5 x 29.5	83.5 x 55.5 x 29.5	83.5 x 55.5 x 29.5	83.5 x 55.5 x 29.5	83.5 x 55.5 x 29.5	83.5 x 55.5 x 29.5
Condenser Type		Copper Condenser	Copper Condenser	Copper Condenser	Copper Condenser	Copper Condenser	Copper Condenser	Copper Condenser	Copper Condenser
Outdoor Unit	Net/Gross Weight (kg)	20.8/24.8	20.5/24.5	25.5/30.2	25.5/30.2	25.5/30.2	25.5/30.2	28.6/33	28.6/33
Compressor Type		High EER Rotary - BLDC	High EER Rotary - BLDC	High EER Rotary - BLDC	High EER Rotary - BLDC	High EER Rotary - BLDC	High EER Rotary - BLDC	High EER Rotary - BLDC	High EER Rotary - BLDC
Compressor Acoustic Jacket		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Fan Motor Type		AC	AC	BLDC	BLDC	BLDC	BLDC	AC	AC
Expansion Device		Capillary	Capillary	Capillary	Capillary	Capillary	Capillary	Capillary	Capillary
Refrigerant		R 32	R 32	R 32	R 32	R 32	R 32	R 32	R 32
Valve Size	Gas/Liquid (mm)	9.52mm / 6.35mm	9.52mm / 6.35mm	12.7mm / 6.35mm	12.7mm / 6.35mm	12.7mm / 6.35mm	12.7mm / 6.35mm	12.7mm / 6.35mm	12.7mm / 6.35mm
Maximum Ambient Temperature	°C	52	52	52	52	52	52	52	52
Installation Kit									
Copper Pipe	m	3	3	3	3	3	3	3.5	3.5
IDU to ODU Interconnecting Wire	Gauge/Core/Length	1.5 Sq mm / 4Core / 3 mtr	1.5 Sq mm / 4Core / 3 mtr	1.5 Sq mm / 4Core / 3 mtr	1.5 Sq mm / 4Core / 3 mtr	1.5 Sq mm / 4Core / 3 mtr	1.5 Sq mm / 4Core / 3 mtr	2.5 Sq mm / 4Core / 3.5 mtr	2.5 Sq mm / 4Core / 3.5 mtr
Maximum Piping Capability	Max. length (m)	12	12	15	15	15	15	15	15
	Max. Height (m)	5	5	5	5	5	5	5	5
Refrigerant Additional Charge	Beyond 4 metre (g/m)	8	8	10	10	10	10	10	10

* Noise level reflects the levels in Anechoic Chamber

All above performance data are as per IS 1391 Rated conditions

As a continuing policy of product innovation at Voltas, the design and specification are subjected to change without prior notice

Product images are for illustrative purposes only and may differ from the actual product

VOLTAS ADJUSTABLE INVERTER AC



**4STAGE
ADJUSTABLE MODE**




SUPERDRY



**ANTI-MICROBIAL
AIR FILTRATION**




**100%
COPPER**

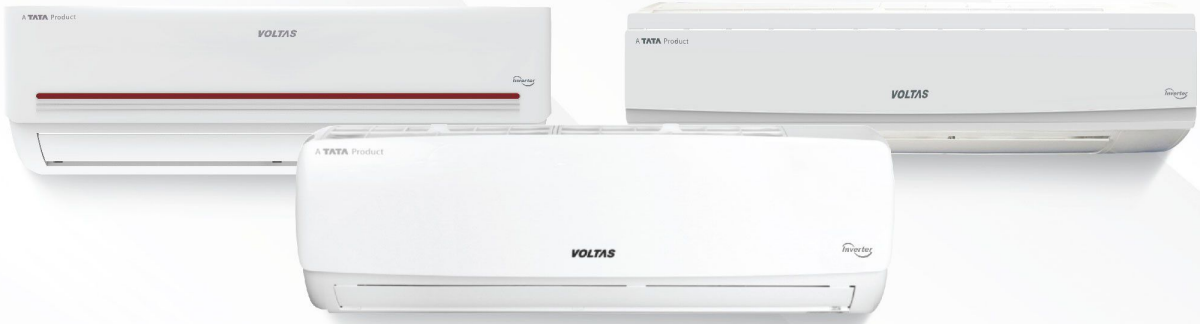

VOLTAS ADJUSTABLE™ INVERTER AC

MAR-2024



Visit us at www.voltas.com
To locate your nearest store,
log on to: www.voltas.com/apps/store-locator

Voltas 24x7 Customer Service - 1860 599 4555, 9650694555
For product registration, SMS <WTA> to 9289525321
Buy only genuine Voltas stabilisers.

Follow us at [f My Voltas](#) [x My Voltas](#) [i My Voltas](#)
[in Voltas Limited](#) [v My Voltas](#)

Buy online at:
voltas.com

Corporate Head Office: Voltas Limited, Voltas House A, Dr. Babasaheb Ambedkar Road, Chinchpokli, Mumbai - 400033, Phone: 022-66656666. **Delhi:** Voltas Limited, A-43, Mohan Co-Operative Industrial Estate, Mathura Road, New Delhi - 110044, Phone: 011-66505550. **Ghaziabad:** Voltas Limited, D-15, R.S. Plaza, 3rd Floor, Raj Nagar, RDC, Ghaziabad - 201001, Phone: 0120-4880451. **Chandigarh:** Voltas Limited, Plot No. 194-195, First Floor, Industrial Area Phase-2, Chandigarh - 160002, Phone: 0172-4111800. **Lucknow:** Voltas Limited, Shalimar Titanium, Block - C, 4th Floor, Office Nos. 410 - 412, Plot No. TCG -1/1, Opp. Indira Gandhi Pratishthan, Vibhuti Khand, Gomti Nagar, Lucknow - 226010, Mobile: 9650694555. **Jaipur:** Voltas Limited, Diamond Tower, 201-203, Purani Chungi, Ajmer Road, Jaipur - 302021, Phone: 0141-2972015. **Hyderabad:** Voltas Limited, 7-2-1735, Sanath Nagar, Opposite Neelima Hospital, Hyderabad - 500018, Ph: 040-66746818. For Institutional Enquiry Phone: 040 - 66743001, 8056104023. **Vijayawada:** Voltas Limited, 23-24-29, Beside Nadars Function Hall, Bhagat Singh Road Corner, Vijayawada - 520011. For Institutional Enquiry Mobile: 8056104023. **Bangalore:** Voltas Limited, 7th Floor, Pride Hulkul, Lalbagh Road, Bangalore - 560027. For Institutional Enquiry Phone: 080-22535600, 8056104023. **Chennai:** Voltas Limited, No. 624, Anna Salai, Teynampet, Chennai - 600018, Phone: 044-66760309. **Kochi:** Voltas Limited, Shema Building, Door No. 39/4166, M.G. Road, Ravipuram, Kochi, Kerala - 682016, Phone: 0484-6605555. **Coimbatore:** Voltas Limited, 1413, Trichy Road, Coimbatore - 641018, Phone: 0422-6619051/31. **Mumbai & Thane:** Voltas Limited, Voltas House B, 3rd Floor, T.B. Kadam Marg, Chinchpokli, Mumbai - 400033, Phone: 022-66656333. **Pune:** Voltas Limited, Behind Adi Marbles, Pune International Airport Area, Chandan Nagar, Pune, Maharashtra - 411014 Phone: 020-68687400. **Nagpur:** Voltas Limited, Adisun Trade Center, 5th Floor, Plot No.-38, Dhaga Layout, Near Crazy Castle, Nagpur- 440010, Phone: 0712-2970274. **Ahmedabad:** Voltas Limited, A-301, Shivalik Corporate Park, Shivrangini Cross Road Satellite, Ahmedabad - 380015, Phone: 0790-66301190/91. **Indore:** 501-B, 5th Floor, NRK Business Park, Block B-1, PU-4, Sch. No. 54 Vijay Nagar Square, A.B. Road, Indore - 452010, M.P., Phone: 0731-4043512/4046393. **Raipur:** Voltas Limited, Shop No. 6008, 6009, 6th floor, Currency Tower, Near VIP Chowk, Raipur, Chhattisgarh - 492001, Mobile: 7712990886. **Kolkata:** Voltas Limited, Unit No. 805, 8th Floor, Godrej Waterside Tower-2, Plot No.-5, Block DP, Sector-V, Salt Lake, Kolkata - 700091, Phone: 033-66266200/205. For Institutional Enquiry Mobile: 9007014430. **Patna:** Voltas Limited, 4th Floor, Block- B, SAI Corporate Park, Bailey Road, Ruknपुरa, Patna, Bihar - 800014. For Institutional Enquiry Mobile: 9007014430. **Jamshedpur:** Voltas House, 3rd Floor, Bistupur, Jamshedpur, Jharkhand - 831001, Mobile: 9931797771. **Bhubaneswar:** Voltas Limited, Utkal Signature Tower, Plot no- 273, Khata No- 352/146, District - Khurda, Pahal, Bhubaneswar - 752101, Mobile: 9669698152. **Guwahati:** Voltas Limited, Upasana Palace Building, 6th Floor, Dr. Rajendra Prasad Road, Near Ganesh Mandir, Ganeshguri, Guwahati - 781006, Mobile: 9678008828. For Institutional Enquiry Mobile: 9007014430.

■ In India, E-Waste (Management and Handling) Rules 2016 /w E-Waste Management Amendment Rules 2018 has been notified by the Ministry of Environment, Forests and Climate Change Government of India. Voltas Limited (Voltas) stands committed to implement E-Waste Rules. Voltas has done tie-up with the government authorised E-Waste Recycler for facilitating our Channel partners/customers to dispose and/or discard Electrical and Electronic Products after its end-of-life (when a product/part is non-operational or non-repairable) and including spare parts. The authorised Recycler has expertise in assisting Voltas in fulfilling their compliances related to EPR and E-Waste Management. Channel partners/customers need to get in touch with Voltas Call Centre (9650694555) to dispose and/or discard Electrical and Electronic Products after its end-of-life. Channel partners/customers should contribute to resource conservation and prevent potential environmental problems by a simple action — the proper depositing of their old consumer durable products, its accessories or defective spares with authorised Recyclers. E-waste should be disposed of separately from the general waste stream via designated collection facilities identified by Voltas.

*Voltas Adjustable Inverter AC can deliver cooling at multiple tonnage capacities, as selected by the user on the AC remote, hence optimising power consumption. Features are available in select models only. T & C apply. **As per third party report. As a continuous policy of product innovations at Voltas, designs and specifications are subject to change without prior notice.